



DECLARATION OF PERFORMANCE

NO 1393

24




Unique identifier of the product type: PA33CLSF150

Application: Sandwich panels with mineral wool core, XPS lugs and sheet metal surface;
exterior walls, partition walls

Manufacturer name: Isolamin Sweden AB, Industrivägen 5, SE-95632 Överkalix

System: 3

Harmonised standard: EN 14509:2013

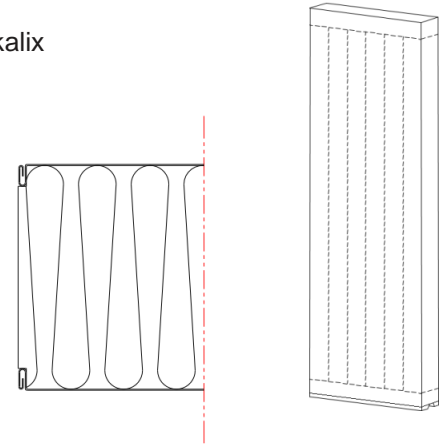

Panel	33CLSF150
Thickness	150 mm
Weight	21.6 kg/m ²
Standard widths	565, 1180 mm
U-value	~ 0.27 W/m ² K

Essential characteristics	Performance	Harmonised technical specification
Tensile strength	NPD	EN 14509:2013
Shear strength	NPD	EN 14509:2013
Sliding Module	NPD	EN 14509:2013
Compressive	NPD	EN 14509:2013
Bending resistance	NPD	EN 14509:2013
Reaction to fire	NPD	EN 13501-1:2007
Fire resistance	NPD	EN 13501-2:2016
Fire protection capability	NPD	EN 14509:2013
Thermal resistance	3.61 m ² K/W	EN 14509:2013
Permeability of water	NPD	EN 12865
Air permeability	NPD	EN 11214
Vapor permeability	NPD	EN 14509:2013
Airborne sound insulation	NPD	ISO 354:2003
Sound absorption	NPD	EN ISO 11654
Dimensional stability	PASS	EN 14509:2013
Durability	PASS	EN 14509:2013

Tolerans	Core material	Surface material
Length: ± 5 mm Width: ± 1 mm Thickness: +0/-1 mm Perpendicularity: 1 mm/m Surface roughness: +0/-0.35 mm	Material: Mineral wool + XPS Density: 80 kg/m ³ ±10% 180 kg/m ³ ±10%	Material: Hot dip galvanized steel sheet Thickness: 0.5/0.6mm

Signed on behalf of the manufacturer:
Överkalix 2024-03-04*Michael Ottesen Fossen*

Michael Ottesen Fossen

Isolamin Sweden AB
R&D Technician / Project coordinator